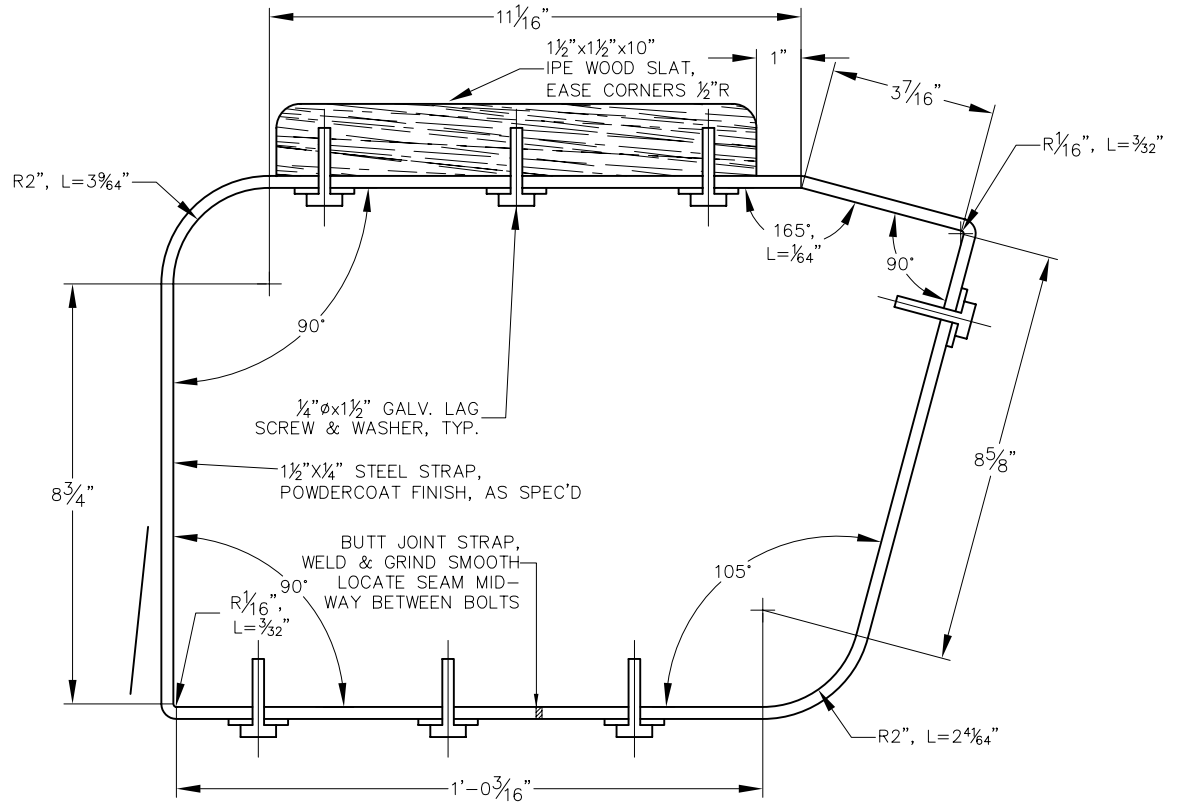

NOTE:
SEE DRAWING PR-970A FOR ARMREST ATTACHMENT TO BENCH.

DETAIL–OPTIONAL ARMREST

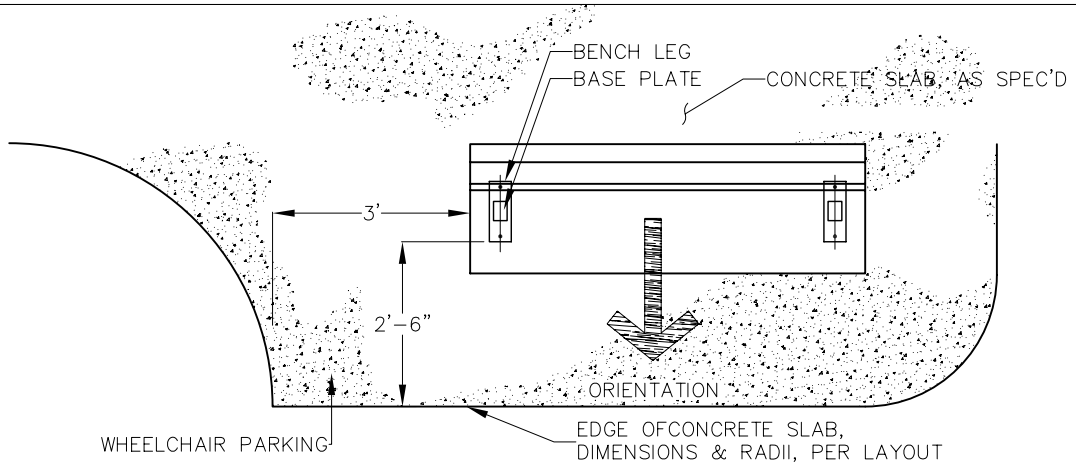

PLAN II W/ CONCRETE SLAB

NOTES:

A. ALL STEEL SHALL BE A36 STRUCTURAL UNLESS NOTED OTHERWISE.
B. ALL STEEL SHALL BE SAND-BLASTED CLEAN, AND PRE-WASHED WITH AN IRON PHOSPHATE POWDER WASH, DRIED, PRIMED WITH ZINC PRIMER, AND POWDER COATED BLACK BAKED AT 400 DEGREES FOR NO LESS THAN 45 MINUTES, UNLESS NOTED OTHERWISE NOTED.
C. ALL FASTENERS SHALL BE GALVANIZED.
D. MOUNT ONLY ON CONCRETE PAVEMENT OR FOOTING.
E. STEEL ELEMENTS SHALL BE CONSTRUCTED IN ACCORDANCE WITH AISC CODE OF STANDARD PRACTICE.
F. CONCRETE SLAB & SUBGRADE REQUIRE SITE SPECIFIC DESIGN.

PARKS AND RECREATION DESIGN AND DEVELOPMENT	CITY OF BELLINGHAM STANDARD PARK BENCH DETAIL–ARMREST	DRAWING 2870.02 DATE: 10/11/06